


SP-PY

White and opaque BOPP, both sides glossy.

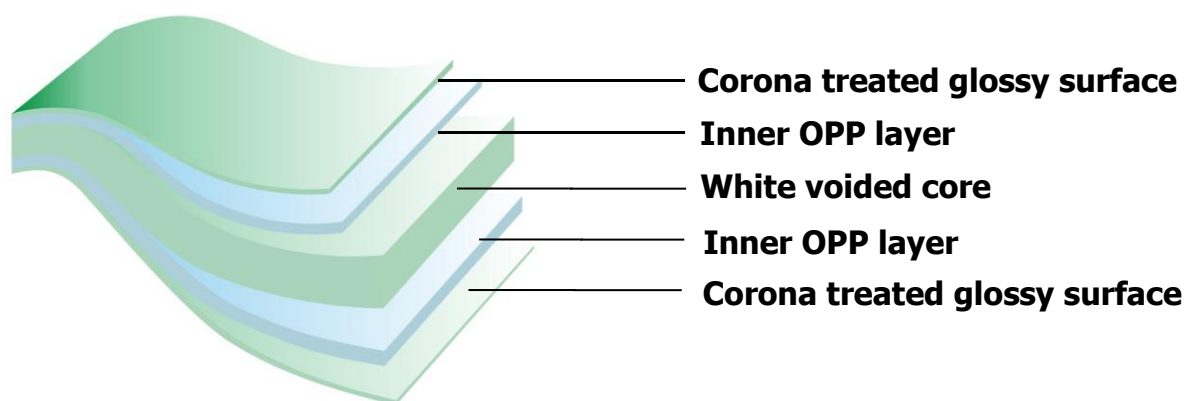

FEATURES

- High moisture, chemicals oil, and scratching resistance
- Recyclable with polyolefin materials
- High mechanical strength, good dimensional stability
- Good durability
- Excellent die-cutting
- Suitable for gravure, flexographic printing

STANDARD ROLL SIZE AVAILABILITY

Film	Standard length (meters)		
	750mm	850mm	890mm
SP-PY	750mm	850mm	890mm

Outside Diameter for Core 76mm

Outside Diameter for Core 152mm

Note: Other roll sizes are available subject to negotiation.

Various sheet samples are available on request.

TECHNICAL DATA (typical value)

Application		Bopp Film				
Product code		SP-PY				
Appearance		Both sides glossy				
Thickness (μm)		48	68	80	80	88
Density (g/cm ³)		0.80	0.75	0.68	0.75	0.75
Weight (g/m ²)		38.4	51.0	54.4	60.0	66.0
Yield (m ² /kg)		26.0	19.6	18.4	16.7	15.2
Opacity(%)		77.3	80.7	86.5	86.6	85.6
Gloss(%)	Glossy	73.7	84.6	89.9	85.5	86.6
	Matt	73.1	86.0	89.4	89.1	86.1
Whiteness (%)	Glossy	77.9	77.5	83.1	78.9	80.9
	Matt	78.1	77.4	81.2	77.9	80.9
Surface Tension (dyne/cm)	Glossy	≥38	≥38	≥38	≥38	≥38
	Matt	≥38	≥38	≥38	≥38	≥38
Roughness (μm)	Glossy	0.07	0.05	0.05	0.06	0.06
	Matt	0.08	0.07	0.06	0.05	0.05
Tensile strength (Mpa)	MD	80.8	73.7	64.0	79.3	78.3
	TD	169.4	159.7	157.0	184.9	173.5

* Experimental data, only for reference.

FILM STORAGE

For the storage of Lichang BOPP film, it is recommended that dry conditions at temperatures below 30° to minimize the deterioration of the film properties in general. The film is suitable for use up to 6 months from the date of production.

Quanzhou Lichang Plastics Co. Ltd.

www.lichangplastic.com

Manufacture: Fuxian Industry Zone, Shuitou Town, Nan'an City, Fujian Province, China,362342

Head Office Tel: +86 0595-86997773; +86 0595-86997757

Overseas Marketing Department Tel: +86 0592-5023518

This figures and data provided in this datasheet are consistent with the current state of our knowledge and are intended to provide average or typical values about our products and their applications. Use of this information is limited to the specific recipient. The user is solely responsible for all determinations regarding use and we disclaim liability for any loss or damage that may occur from the use of this information.

Certified according to ISO 9001. Lichang BOPP films do not present any significant danger to health and safety in the workplace.

Edition: APR 2019